


Switching element - Not recommended for new design

704.910.4BFS

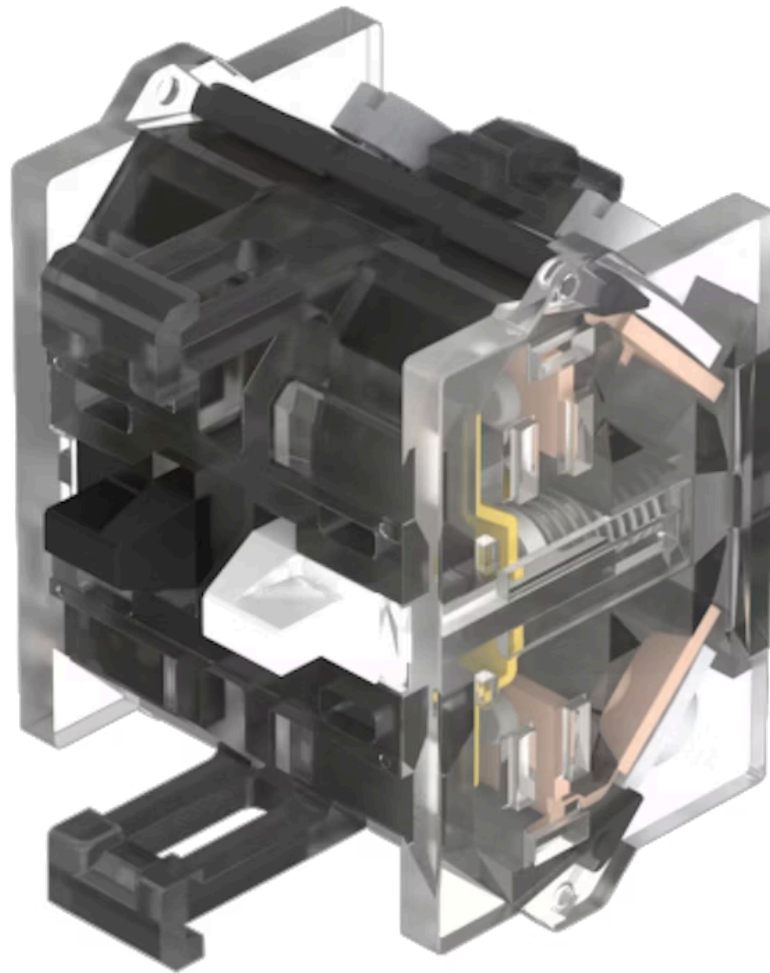

<https://www.eao.com/component/704.910.4BFS/en...>

Your product:



704.910.4BFS

Switching element - Not recommended for new design

PRODUCT RANGE

Product Status: Not Recommended for new design

successor product: <https://www.eao.com/c/704.910.4BFS-1>

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:	as per DIN EN IEC 60947-5-1		
	voltage	DC13	AC15
	24 V	4.0 A	8.0 A
	60 V	1.5 A	8.0 A
	110 V	1.0 A	
	120 V		8.0 A
	230 V	0.4 A	7.0 A
	400 V	0.2 A	5.0 A
	500 V	0.15 A	4.0 A
	as per UL 60947-5-1		
	voltage	power	
	24 VDC	4.0 A, Pilot duty	
	60 VDC	1.5 A, Pilot duty	
	120 VDC	1.0 A, Pilot duty	
	240 VDC	0.4 A, Pilot duty	
	415 VDC	0.2 A, Pilot duty	
	480 VDC	0.14A, Pilot duty	
	120 VAC	8.0 A, Pilot duty	
	240 VAC	7.0 A, Pilot duty	
	415 VAC	5.0 A, Pilot duty	
	480 VAC	4.0 A, Pilot duty	
	For voltages greater than Ue = 400 V, the grid dimensions must not be less than 35 mm x 50 mm.		

Contacts:	1 NC / 1 FS		
Rated impulse withstand voltage Uimp:	4 kV, according to EN/IEC 60947-5-1		
Rated insulation voltage Ui:	500 V		
Recommended minimum operational data:	Gold-silver contacts		
	Voltage	24 VDC	110 VDC
	Current	5 mA	2 mA
	Hard silver contacts		
	Voltage	24 VDC	110 VDC
	Current	50 mA	10 mA
Switching rating:	500 V @ 10 A		

Electrical lifetime:	50 000 cycles of operation
Pollution degree:	3
Standards:	The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1
Thermal current I_{th}:	10 A Max. permissible current for continuous operation and ambient temperatures not exceeding the specified max. values.

MECHANICAL CHARACTERISTICS

Terminal:	Screw terminal
Contact material:	Silver
Switching system:	Slow-make switching element
Switching system:	The double-break, slow-make switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The normally closed contact has forced opening. Slow-make contacts with forced action are ideal for high switch ratings.
Operating force:	1 Normally closed approx. 2 N, 1 Normally open approx. 3 N
Tightening torque:	Screw terminal 0.5 Nm
Wire cross section:	Max. wire cross-section 2 mm x 2.5 mm ² Skinning wire 10 mm Max. wire cross-section of stranded cable 2 x 1.5 mm ² use stranded wires only with wire end ferrules of 10 mm length Only one polarity is allowed on each side when wiring.
Weight:	0.015 kg

AMBIENT CONDITION

IP Protection:	IP00
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C
Shock resistance:	300 m/s ² , pulse width 11 ms, 3-axis, (single impacts, semi-sinusoidal as per DIN EN 60068-2-27)
Vibration resistance:	100 m/s ² at 10 Hz ... 500 Hz, amplitude 0.75 mm, (sinusoidal according to DIN EN 60068-2-6)
Climate resistance:	Relative humidity, max. 95%, non-condensing

CERTIFICATE

Approbations:	CB (IEC 60947-5-1), cULus, DNV, EAC, NFF, VDE
Conformities:	CE, CCC, UKCA
REACH:	REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Switching element - Not recommended for new design, Slow-make switching element, 500 V @ 10 A, Silver, 1 NC / 1 FS, Screw terminal


Product attributes: For ring cable shoe

Hints: When using the switching element, the application guidelines must be observed.
For the third switching element the terminal marking insert is to be ordered separately
Operating temperature: Other temperatures on request

Special requirements: Special requirements for positive-opening auxiliary current switches
Positive opening travel
Minimum force
Max. travel


Emergency
Emergency
which i
Emergency

Wiring diagrams:

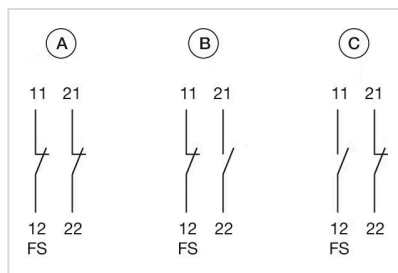

A = mounted, not actuated
B = mounted, actuated
C = not mounted, not actuated

Dimension drawings:

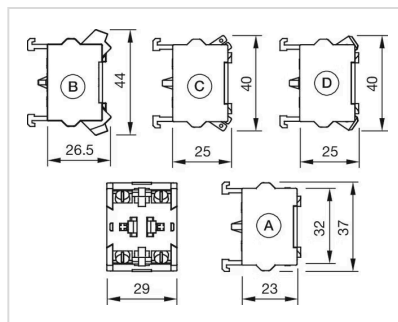

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm