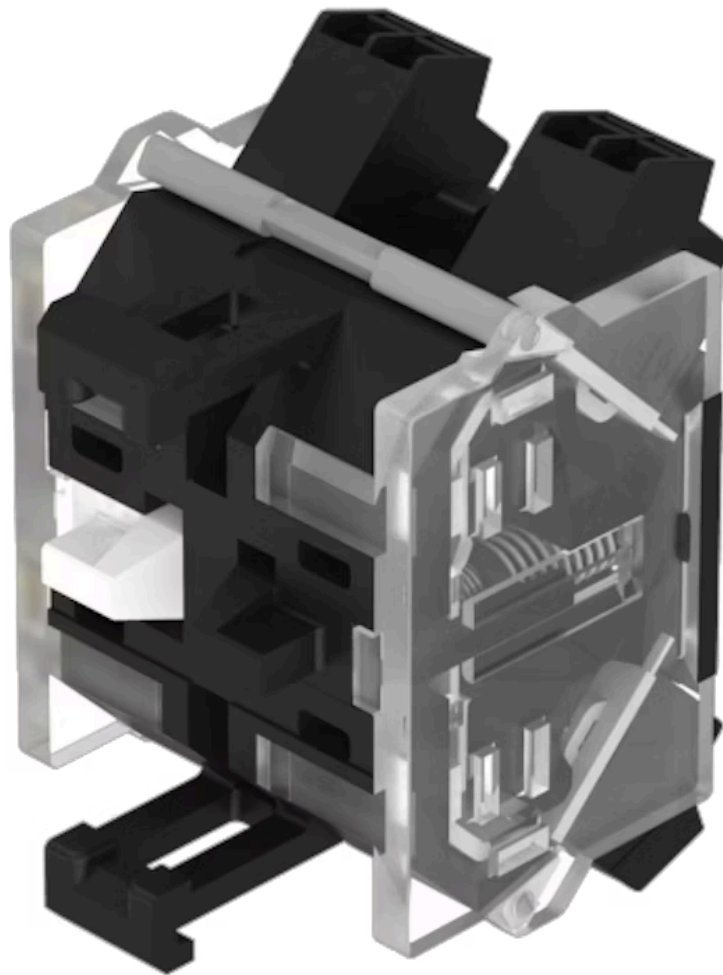


Switching element - Not recommended for new design

704.917.3



<https://www.eao.com/component/704.917.3/en/sw...>

Your product:



704.917.3

Switching element - Not recommended for new design

PRODUCT RANGE

Product Status: Not Recommended for new design

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:	as per DIN EN IEC 60947-5-1		
	voltage	DC13	AC15
	24 V	4.0 A	8.0 A
	60 V	1.5 A	8.0 A
	110 V	1.0 A	
	120 V		8.0 A
	230 V	0.4 A	7.0 A
	400 V	0.2 A	5.0 A
	500 V	0.15 A	4.0 A
	as per UL 60947-5-1		
	voltage	power	
	24 VDC	4.0 A, Pilot duty	
	60 VDC	1.5 A, Pilot duty	
	120 VDC	1.0 A, Pilot duty	
	240 VDC	0.4 A, Pilot duty	
415 VDC	0.2 A, Pilot duty		
480 VDC	0.14A, Pilot duty		
120 VAC	8.0 A, Pilot duty		
240 VAC	7.0 A, Pilot duty		
415 VAC	5.0 A, Pilot duty		
480 VAC	4.0 A, Pilot duty		
Contacts:	2 NO		
Rated impulse withstand voltage Uimp:	4 kV, according to EN/IEC 60947-5-1		
Rated insulation voltage Ui:	500 V		
Recommended minimum operational data:	Gold-silver contacts		
	Voltage	24 VDC	
	Current	5 mA	
	Hard silver contacts		
	Voltage	24 VDC	
	Current	50 mA	
Switching rating:	250 V AC @ 6 A		
Electrical lifetime:	50 000 cycles of operation		
Pollution degree:	3		

Standards: The switches comply with the "Standards for low-voltage switching devices" EN IEC 60947-5-1

Thermal current I_{th}: 6 A 10 A Max. zulässiger Strom bei Dauerbetrieb und Umgebungstemperaturen, welche die angegebenen max. Werte nicht überschreiten. 10 A Max. permissible current for continuous operation and ambient temperatures not exceeding the specified max. values.

MECHANICAL CHARACTERISTICS

Terminal: Push-in terminal

Contact material: Gold

Switching system: Slow-make switching element

Switching system: The double-break, slow-make switching element is equipped with one or two independent contact systems, acting as normally open or normally closed contact. The normally closed contact has forced opening. Slow-make contacts with forced action are ideal for high switch ratings.

Operating force: 1 Normally closed approx. 2 N, 1 Normally open approx. 3 N

Wire cross section: Max. wire cross-section 2 wires with 1 mm
Skinning wire 8 mm
Max. wire cross-section of stranded cable 2 x 0.75 mm²
use stranded wires only with wire end ferrules of 8 mm length
Only one polarity is allowed on each side when wiring.

Weight: 0.026 kg

AMBIENT CONDITION

IP Protection: IP20

Operating temperature: – 40 °C ... + 55 °C

Storage temperature: – 40 °C ... + 85 °C

Shock resistance: 300 m/s², pulse width 18 ms, (single impacts, semi-sinusoidal as per EN IEC 60068-2-27)

Climate resistance: Relative humidity, max. 95%, non-condensing

CERTIFICATE

Approbations: CB (IEC 60947-5-1), cULus, DNV, EAC, NFF, VDE

Conformities: CE, CCC, UKCA

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description:

Switching element - Not recommended for new design, Slow-make switching element, 250 V AC @ 6 A, Gold, 2 NO, Push-in terminal

Hints:

When using the switching element, the application guidelines must be observed.
For the third switching element the terminal marking insert is to be ordered separately
Operating temperature: Other temperatures on request

Special requirements:

Special requirements for positive-opening auxiliary current switches

Positive opening travel

Minimum force

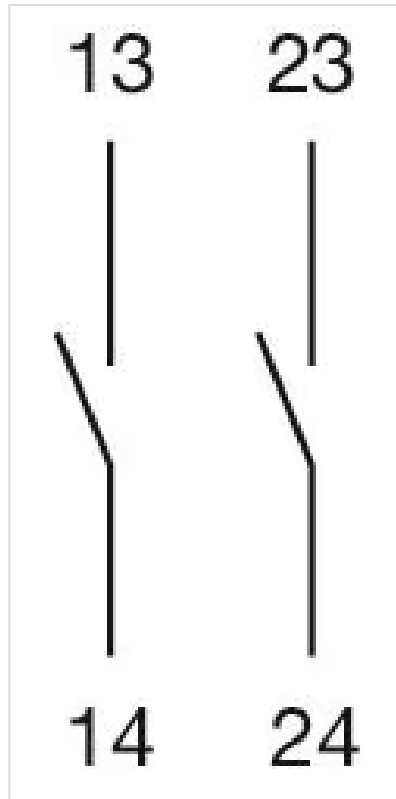
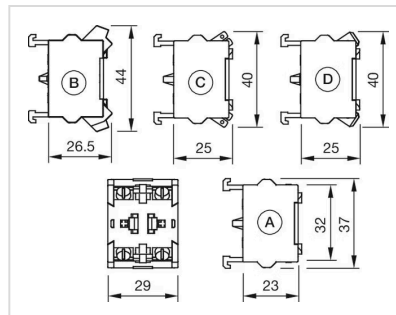
Max. travel

Emerge

Emerge

which i

Emerge

Wiring diagrams:**Dimension drawings:**

A = Screw terminal

B = Push-in terminal (PIT)

C = Plug-in terminal 6.3 mm x 0.8 mm

D = Double plug-in terminal 6.3 mm x 0.8 mm